



## SUPER MULTIPLE JUNCTION (SMJ)

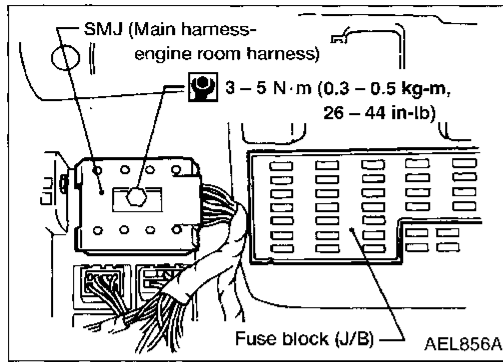

### INSTALLATION

To install SMJ, tighten bolts until orange "fulltight" mark appears and then retighten to specified torque as required.

 : 3 - 5 N·m  
(0.3 - 0.5 kg-m, 26 - 44 in-lb)



### CAUTION:

Do not overtighten bolts, otherwise, they may be damaged.

# SUPER MULTIPLE JUNCTION (SMJ)

## Terminal Arrangement


### MAIN ROOM HARNESS

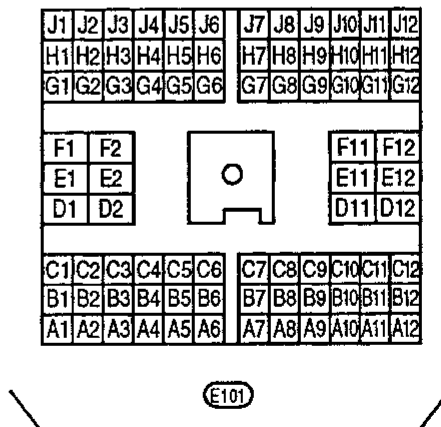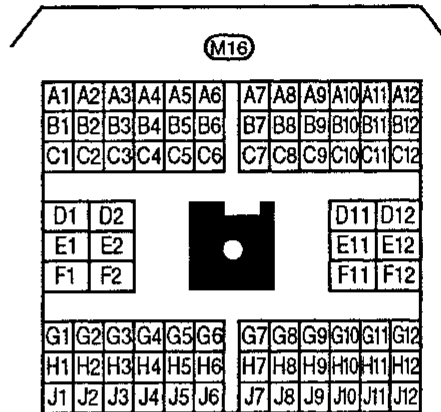


### ENGINE HARNESS

# JOINT CONNECTOR (J/C)

## Location



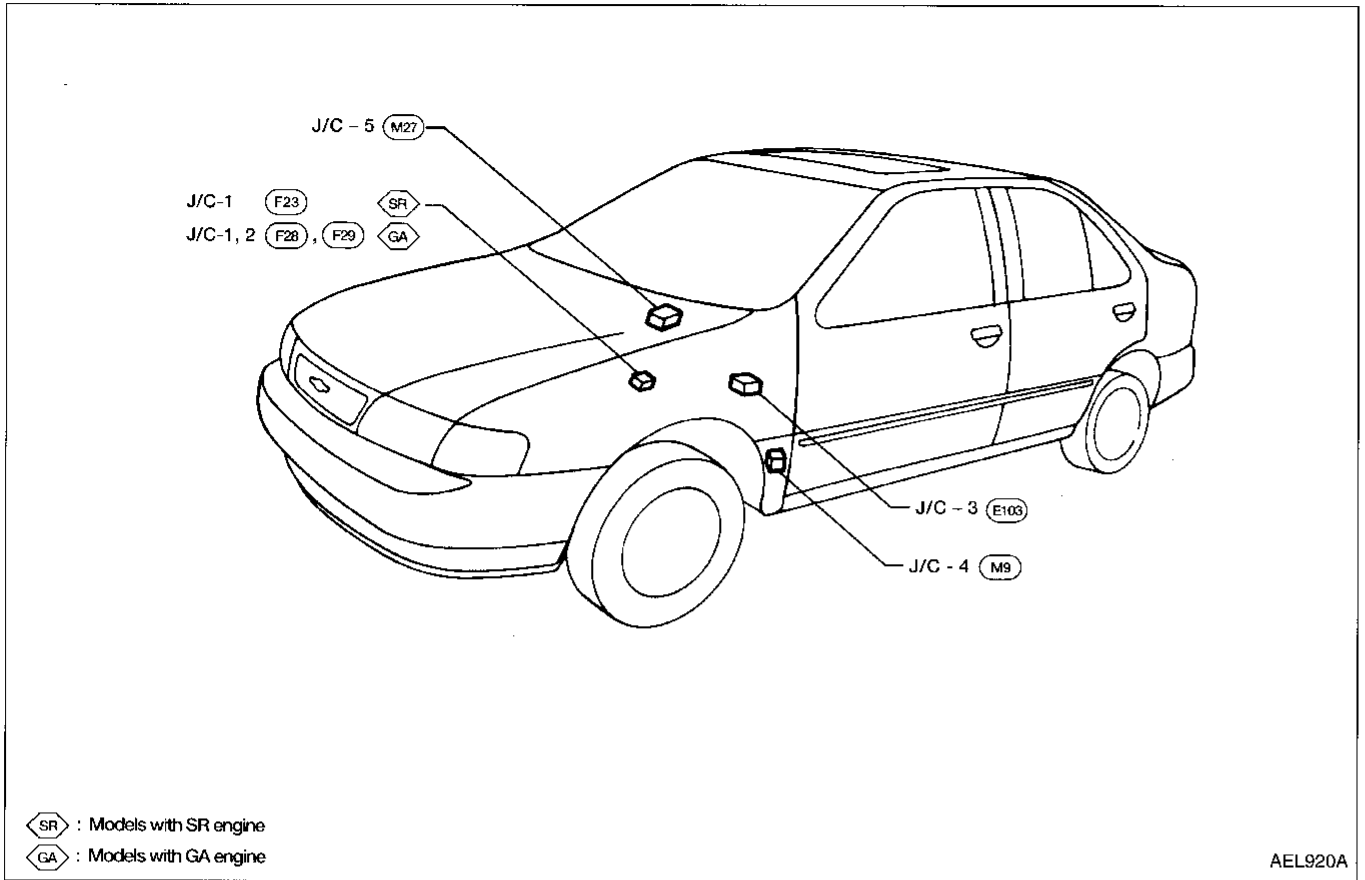


## Terminal Arrangement

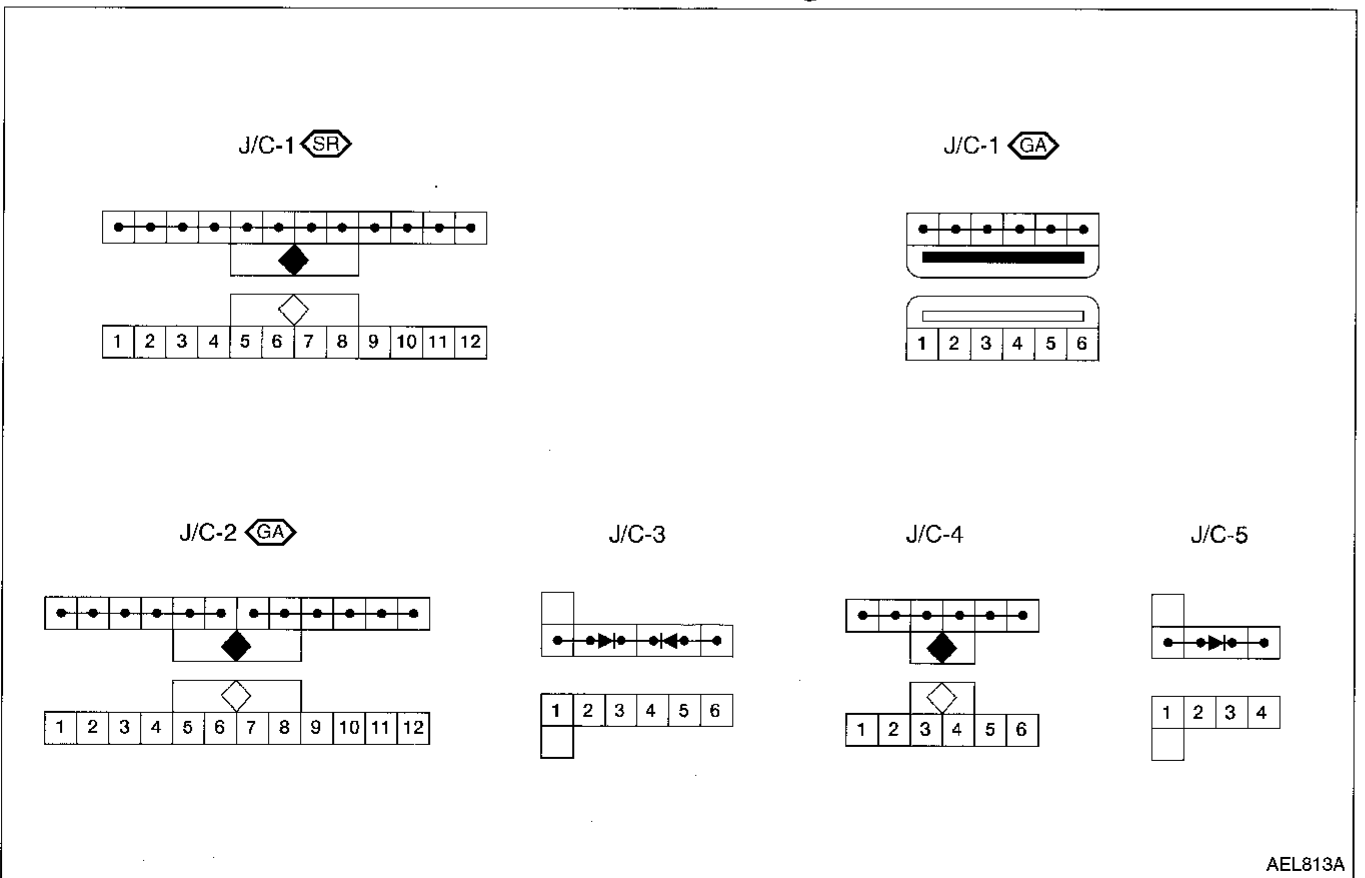

# HYBRID ELECTRIC CONTROL UNIT (HEC)


## Construction and Terminal Arrangement

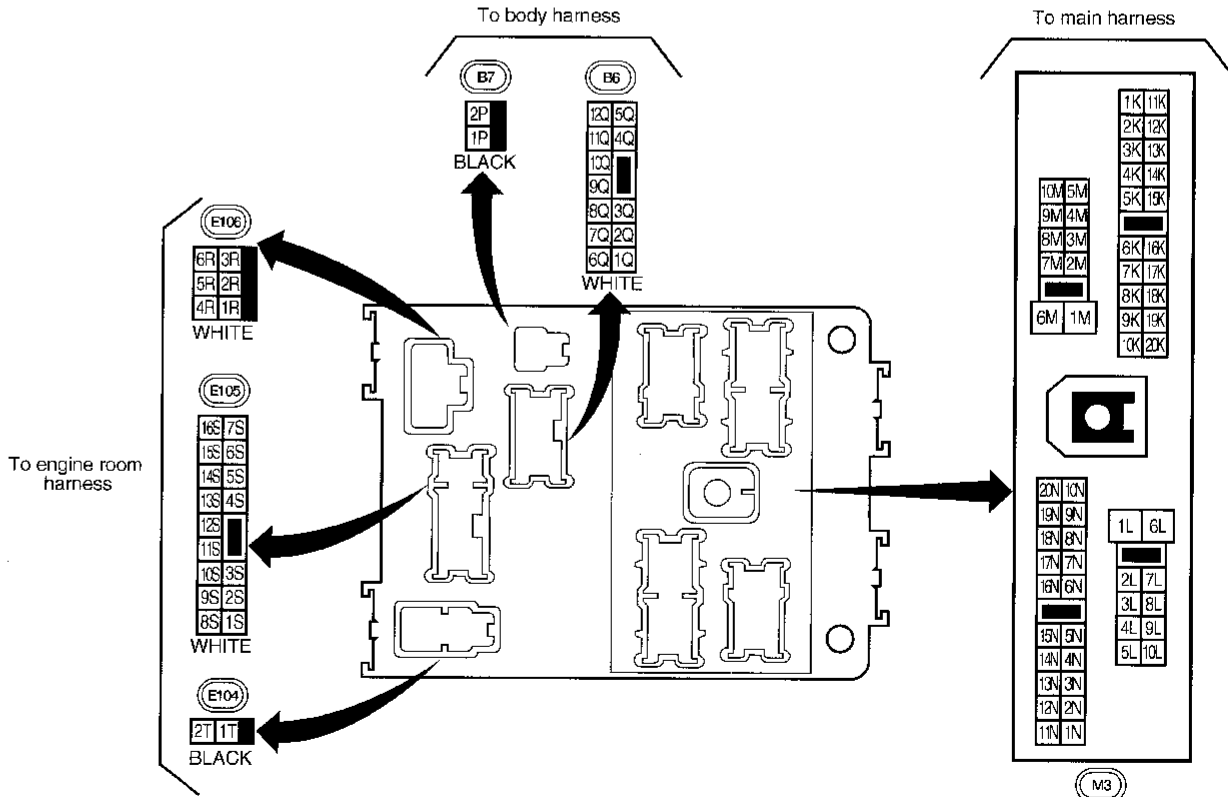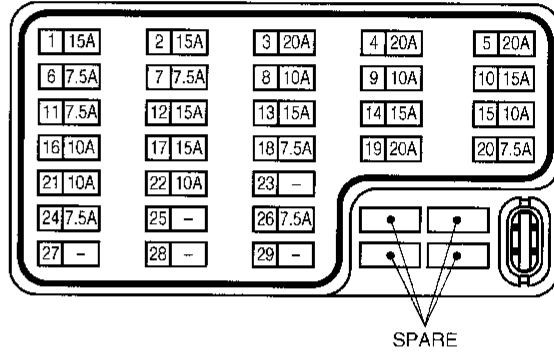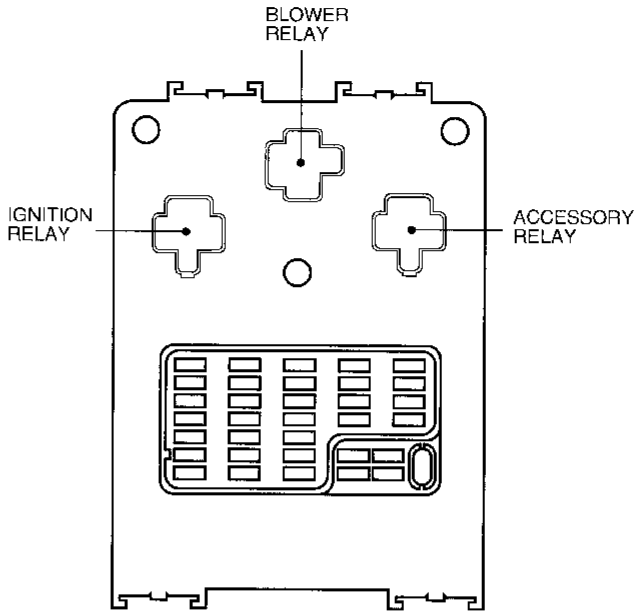




# CONTROL UNITS/MODULE

## SMART ENTRANCE CONTROL UNIT




## AIRBAG DIAGNOSIS SENSOR UNIT




View from harness side

## ABS CONTROL MODULE




## A/T CONTROL UNIT



View from harness side

## ECM (ECCS CONTROL MODULE)

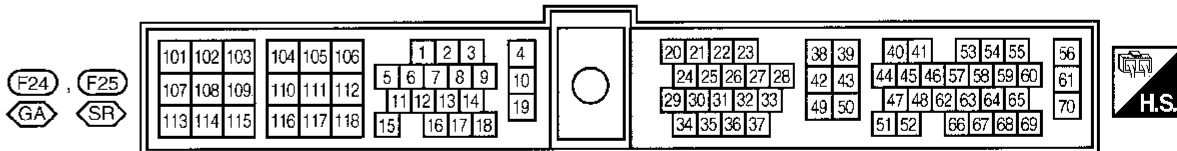

View from harness side

: Models with GA engines

: Models with SR engines