

SECTION **HRN**  
HORN

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
M  
N  
O  
P

CONTENTS

<b>PRECAUTION</b> .....	2	<b>HORN</b> .....	3
<b>PRECAUTIONS</b> .....	2	Wiring Diagram .....	3
Precaution for Supplemental Restraint System (SRS) "AIR BAG" and "SEAT BELT PRE-TEN- SIONER" .....	2	<b>REMOVAL AND INSTALLATION</b> .....	6
<b>WIRING DIAGRAM</b> .....	3	<b>HORN</b> .....	6
		Exploded View .....	6
		Removal and Installation .....	6

HRN

# PRECAUTIONS

< PRECAUTION >

## PRECAUTION

### PRECAUTIONS

#### Precaution for Supplemental Restraint System (SRS) "AIR BAG" and "SEAT BELT PRE-TENSIONER"

INFOID:000000006220273

The Supplemental Restraint System such as "AIR BAG" and "SEAT BELT PRE-TENSIONER", used along with a front seat belt, helps to reduce the risk or severity of injury to the driver and front passenger for certain types of collision. This system includes seat belt switch inputs and dual stage front air bag modules. The SRS system uses the seat belt switches to determine the front air bag deployment, and may only deploy one front air bag, depending on the severity of a collision and whether the front occupants are belted or unbelted. Information necessary to service the system safely is included in the "SRS AIR BAG" and "SEAT BELT" of this Service Manual.

#### **WARNING:**

- To avoid rendering the SRS inoperative, which could increase the risk of personal injury or death in the event of a collision that would result in air bag inflation, all maintenance must be performed by an authorized NISSAN/INFINITI dealer.
- Improper maintenance, including incorrect removal and installation of the SRS, can lead to personal injury caused by unintentional activation of the system. For removal of Spiral Cable and Air Bag Module, see the "SRS AIR BAG".
- Do not use electrical test equipment on any circuit related to the SRS unless instructed to in this Service Manual. SRS wiring harnesses can be identified by yellow and/or orange harnesses or harness connectors.

#### PRECAUTIONS WHEN USING POWER TOOLS (AIR OR ELECTRIC) AND HAMMERS

#### **WARNING:**

- When working near the Air Bag Diagnosis Sensor Unit or other Air Bag System sensors with the ignition ON or engine running, DO NOT use air or electric power tools or strike near the sensor(s) with a hammer. Heavy vibration could activate the sensor(s) and deploy the air bag(s), possibly causing serious injury.
- When using air or electric power tools or hammers, always switch the ignition OFF, disconnect the battery, and wait at least 3 minutes before performing any service.

# HORN


< WIRING DIAGRAM >

## WIRING DIAGRAM

### HORN

#### Wiring Diagram

INFOID:000000006220274

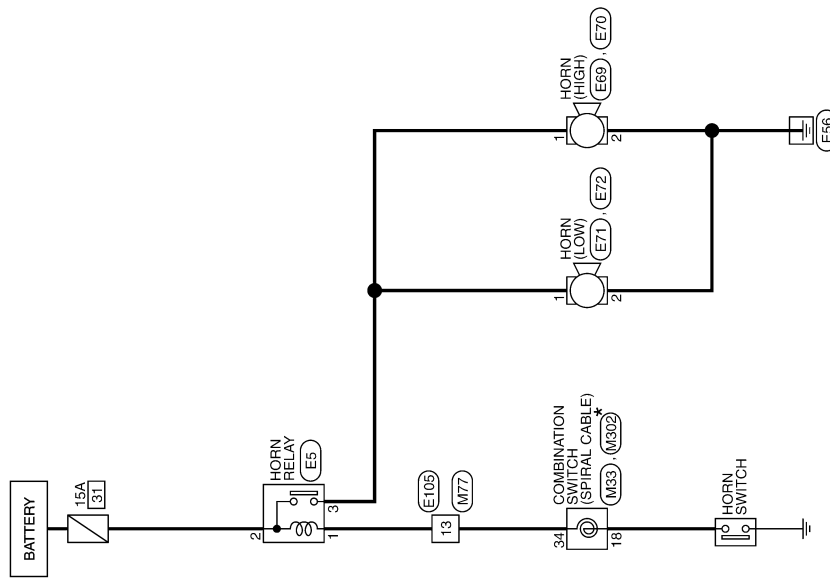

\*: This connector is not shown in "Harness Layout".

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
L  
M  
N  
O  
P

HRN

HORN

2010/02/24

JCLWM5295GB

# HORN

< WIRING DIAGRAM >

## HORN

Connector No.	E5
Connector Name	HORN RELAY
Connector Type	



Terminal No.	Color of Wire	Signal Name [Specification]
1	P/B	-
2	W/B	-
3	R	-

Connector No.	E6
Connector Name	HORN (HIGH)
Connector Type	P01FE-A



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-

Connector No.	E7
Connector Name	HORN (HIGH)
Connector Type	P01FE-A



Terminal No.	Color of Wire	Signal Name [Specification]
2	B	-

Connector No.	E71
Connector Name	HORN (LOW)
Connector Type	P01FB-A



Terminal No.	Color of Wire	Signal Name [Specification]
1	R	-

Connector No.	E72
Connector Name	HORN (LOW)
Connector Type	P01FB-A



Terminal No.	Color of Wire	Signal Name [Specification]
2	B	-

Connector No.	E105
Connector Name	WIRE TO WIRE
Connector Type	TR80MH-CS16-TM4



Terminal No.	Color of Wire	Signal Name [Specification]
1	L	-
2	L/W	-
3	R/B	-
4	L	-

Connector No.	M83
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK08FGY-TV



Terminal No.	Color of Wire	Signal Name [Specification]
24	Y/G	-
25	Y	-
26	B	-
31	Y/L	-
32	R	-
33	B	-
34	P/B	-

5	Y	-
7	W/G	-
8	P/B	-
9	W/B	-
10	L	-
11	L	-
12	P	-
13	P/B	-
14	BR	-
15	L/B	-
16	SB	-
17	P	-
18	BR	-
19	Y/G	-
20	BR/Y	-
21	Y/V	-
22	L	-
23	Y	-
24	L/W	-
25	L	-
26	L/W	-
28	O	-
29	R/W	-
30	L/B	-
31	Y	-
32	GR/R	-
34	Y	-
35	R	-
36	B/R	-
37	G/Y	-
38	G	-
40	SB	-
41	W/R	-
42	R	-
43	V	-
51	L/O	-
52	BR/W	-
53	BR/Y	-
54	GR/L	-
60	W	-
61	B	-
62	R	-
63	G	-
64	SHIELD	-
91	BR	-
92	L/W	-
94	Y/B	-
95	G/R	-
97	R	-
98	G/B	-
100	W/R	-

JCLWM5508GB

# HORN

< WIRING DIAGRAM >

Terminal No.	Color of Wire	Signal Name [Specification]
1	W	
2	L/W	
3	R/B	
4	L	
5	Y	
7	W/G	
8	P/B	
9	W/B	
10	L	
11	L	
12	P	-- [With ICC]
12	R	-- [Without ICC]
13	P/B	
14	BR	
15	O/L	
16	SB	
17	P	
18	BR	
19	Y/G	
20	BR/Y	
21	Y	
22	L	
23	Y	
24	L/W	
26	L	
27	L/W	
28	O	
28	R/W	
30	O/L	
31	Y	
32	GR/R	
34	Y	
35	R	
36	B/O	
37	G/Y	
38	G	
40	SB	
41	W/R	

Terminal No.	Color of Wire	Signal Name [Specification]
42	R	
43	V	
51	L/O	
52	BR/W	
53	BR/Y	
54	GR/L	
60	W	
61	B	
62	G	
63	R	
64	SHIELD	
91	BR	
92	L/W	
94	Y/B	
95	L/R	
97	R	
98	O/L	
100	W/B	

Connector No.	M302
Connector Name	COMBINATION SWITCH (SPIRAL CABLE)
Connector Type	TK0BFGY

Terminal No.	Color of Wire	Signal Name [Specification]
13	--	--
14	--	--
15	--	--
16	--	--
17	--	--
18	--	--
19	--	--
20	--	--



JCLWM5509GB

A  
B  
C  
D  
E  
F  
G  
H  
I  
J  
K  
HRN  
M  
N  
O  
P

# HORN


< REMOVAL AND INSTALLATION >

## REMOVAL AND INSTALLATION

### HORN

Exploded View

INFOID:000000006220275

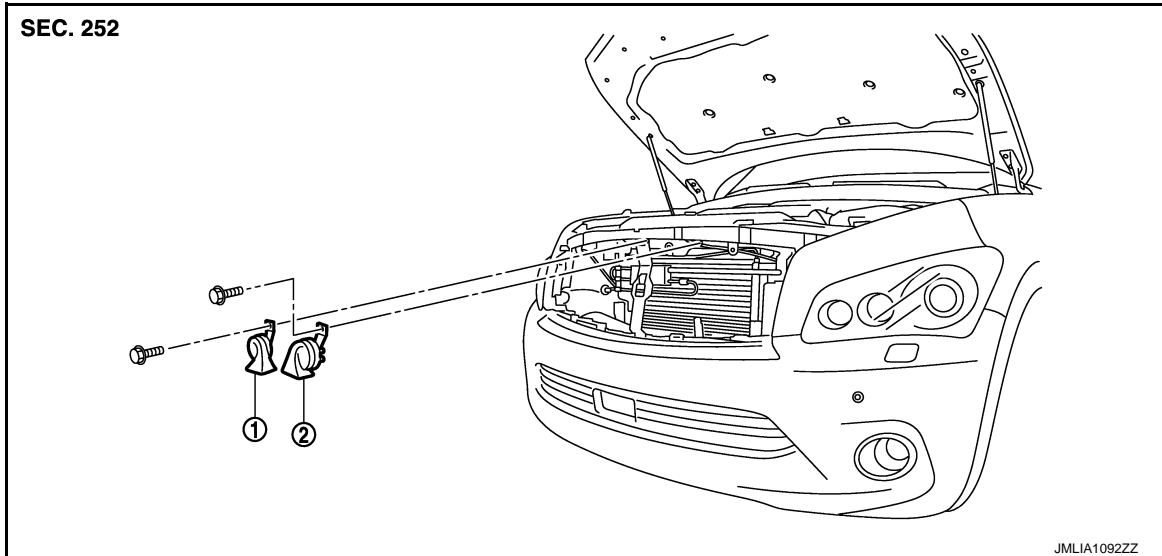

1. Horn (LOW)

2. Horn (HIGH)

### Removal and Installation

INFOID:000000006220276

#### REMOVAL

1. Remove the front grille. Refer to [EXT-19. "Removal and Installation"](#).
2. Disconnect the horn (LOW, HIGH) connectors.
3. Remove the horn mounting bolts, and remove the horns (LOW, HIGH) from the vehicle.

#### INSTALLATION

Install in the reverse order of removal.