

SECTION **PB**
PARKING BRAKE SYSTEM

A
B
C
D
E
PB
G
H
I
J
K
L
M
N
O
P

CONTENTS

SERVICE INFORMATION	2	Removal and Installation	4
PREPARATION	2	PARKING BRAKE SHOE	6
Commercial Service Tool	2	Removal and Installation	6
PARKING BRAKE SYSTEM	3	SERVICE DATA AND SPECIFICATIONS	
On-Vehicle Service	3	(SDS)	9
PARKING BRAKE CONTROL	4	Parking Drum Brake	9
Component	4	Parking Brake Control	9

PREPARATION

< SERVICE INFORMATION >



SERVICE INFORMATION

PREPARATION

Commercial Service Tool

INFOID:000000003532754

The actual shapes of Kent-Moore tools may differ from those of special service tools illustrated here.

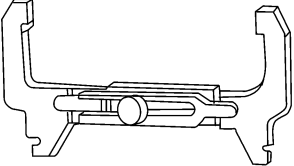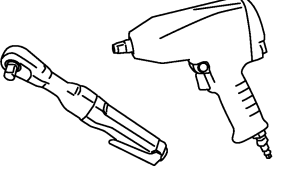Tool number (Kent-Moore No.) Tool name		Description
— (J-21177-A) Brake drum clearance gauge	 WFIA0167E	Measuring rear rotor drum to parking brake shoe clearance
Power tool	 PBIC0190E	Loosening bolts and nuts

PARKING BRAKE SYSTEM

< SERVICE INFORMATION >

PARKING BRAKE SYSTEM

On-Vehicle Service

INFOID:000000003532755

PEDAL STROKE

- When parking brake pedal is operated with the specified force, make sure the stroke is within the specified number of notches. Check by listening and counting the ratchet clicks.


Pedal stroke : 3 – 4 notches [under force of 196 N (20.0 kg-f, 44.1 lb-f)]

INSPECTION

- Make sure the components are attached properly, checking for looseness or backlash.
- Check parking brake pedal assembly for bends, damage and cracks, and replace if necessary.
- Check cable for wear and damage, and replace if necessary.
- Check parking brake warning lamp switch for malfunction, and replace if necessary. Refer to [DI-27, "Wiring Diagram - WARN -"](#).

ADJUSTMENT

1. Remove the lower instrument panel LH. Refer to [IP-10, "Removal and Installation"](#).
2. Partially engage parking brake pedal to access adjusting nut.
3. Insert a deep socket wrench to rotate adjusting nut and loosen cable sufficiently. Then, disengage the parking brake pedal.

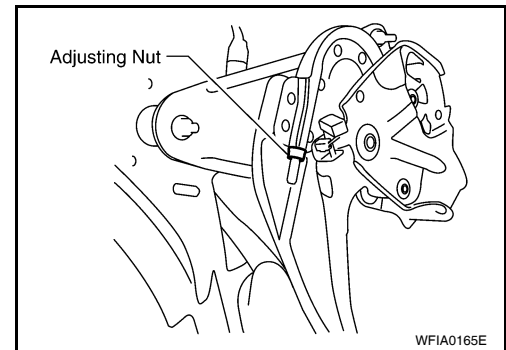


4. Remove the wheel and tire using power tool.
5. Remove the disc rotor and measure inner diameter at widest point using Tool.

Tool number : — (J-21177-A)

6. Transfer measurement less 0.6 mm to the parking brake shoes and adjust accordingly.
7. Using wheel nuts, secure the disc to the hub to prevent it from tilting.
8. Rotate the disc rotor to make sure there is no drag.
9. Adjust cable as follows:
 - a. Operate pedal 10 or more times with a force of 490 N (50 kg-f, 110 lb-f).
 - b. Rotate adjusting nut with deep socket to adjust pedal stroke to specification.

Pedal stroke : 3 – 4 notches [under force of 196 N (20.0 kg-f, 44.1 lb-f)]

- c. With parking brake pedal completely disengaged, make sure there is no drag on the parking brake.
10. Install the disc rotor.
 11. Install the wheel and tire using power tool.
 12. Install the lower instrument panel LH. Refer to [IP-10, "Removal and Installation"](#).

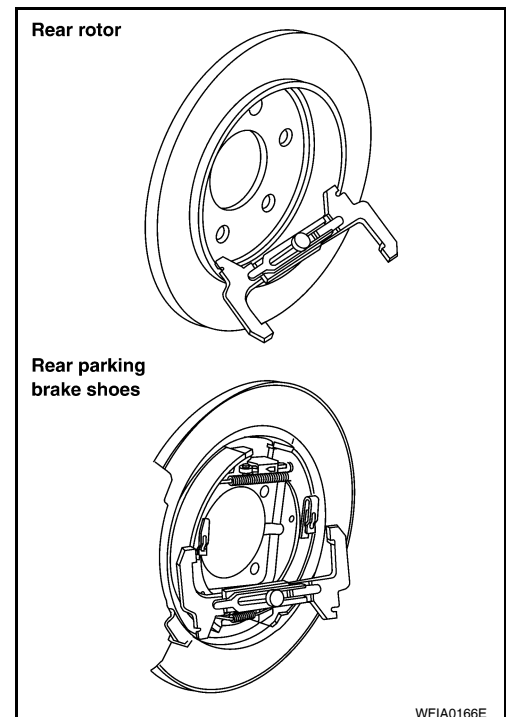


PARKING BRAKE CONTROL

< SERVICE INFORMATION >

PARKING BRAKE CONTROL

Component

INFOID:000000003532756

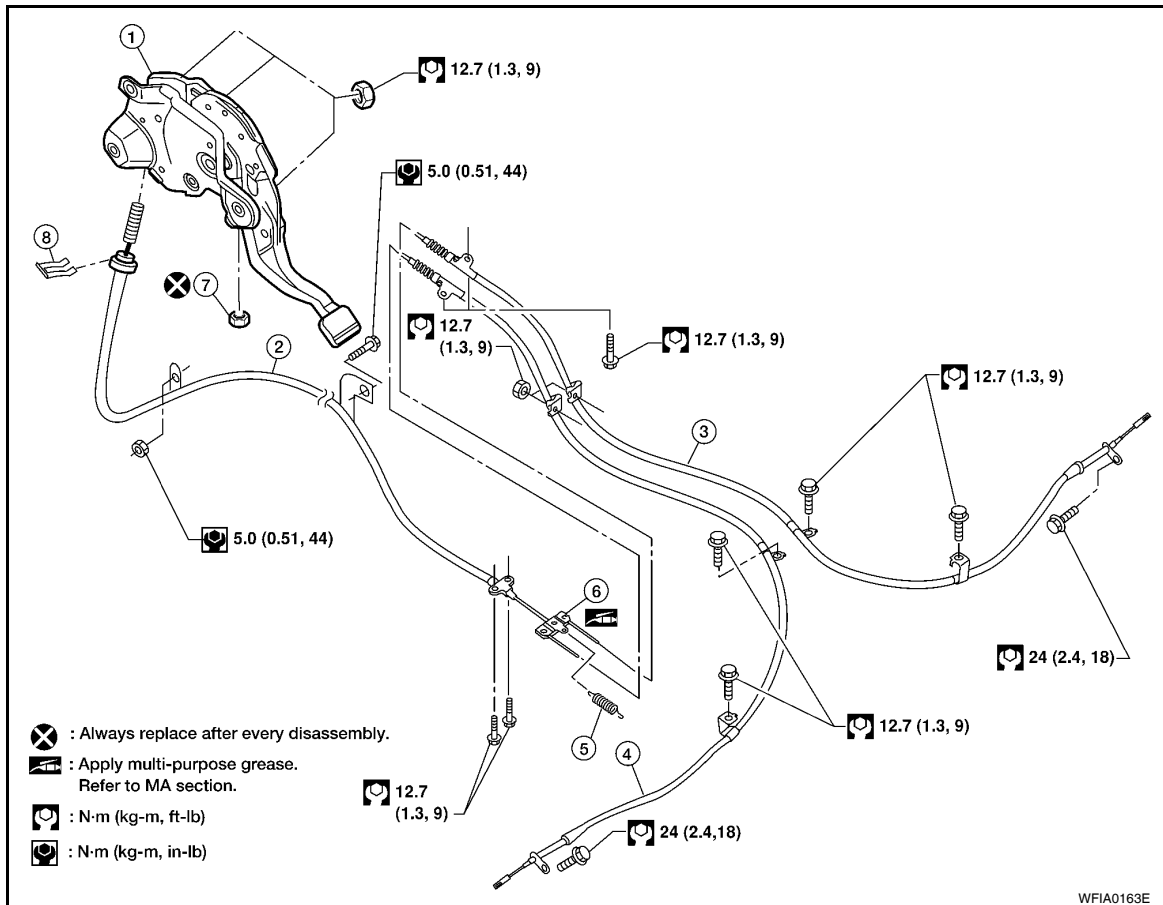

- | | | |
|--------------------|------------------|---------------------|
| 1. Pedal assembly | 2. Front cable | 3. Right rear cable |
| 4. Left rear cable | 5. Return spring | 6. Equalizer |
| 7. Adjusting nut | 8. Lock plate | |

Removal and Installation

INFOID:000000003532757

REMOVAL

1. Remove the lower instrument panel LH and center console. Refer to [IP-10, "Removal and Installation"](#) and [IP-10, "Removal and Installation"](#).
2. Remove the floor trim. Refer to [EI-36](#).
3. Disconnect the parking brake warning lamp switch.
4. Remove the adjusting nut.
CAUTION:
Do not reuse adjusting nut after removing it.
5. Remove the lock plate from the front cable.
6. Remove front cable bolts and nut.
7. Disconnect return spring from equalizer.
8. Disconnect the front cable from the equalizer and remove front cable.
9. Remove the rear disc rotors. Refer to [BR-25, "Removal and Installation of Brake Caliper and Disc Rotor"](#).
10. Remove shoes, and remove left and right rear cables from toggle levers. Refer to [PB-6, "Removal and Installation"](#).
11. Remove equalizer from right and left rear cables.

PARKING BRAKE CONTROL

< SERVICE INFORMATION >

12. Remove right and left rear cable bolts and nuts, then remove right and left rear cables.

INSTALLATION

- Installation is in the reverse order of removal.

CAUTION:

Do not reuse adjusting nut after removing it.

- Adjust parking brake. Refer to [PB-3, "On-Vehicle Service"](#).

A

B

C

D

E

PB

G

H

I

J

K

L

M

N

O

P

PARKING BRAKE SHOE


< SERVICE INFORMATION >

PARKING BRAKE SHOE

Removal and Installation

INFOID:000000003532758

COMPONENTS

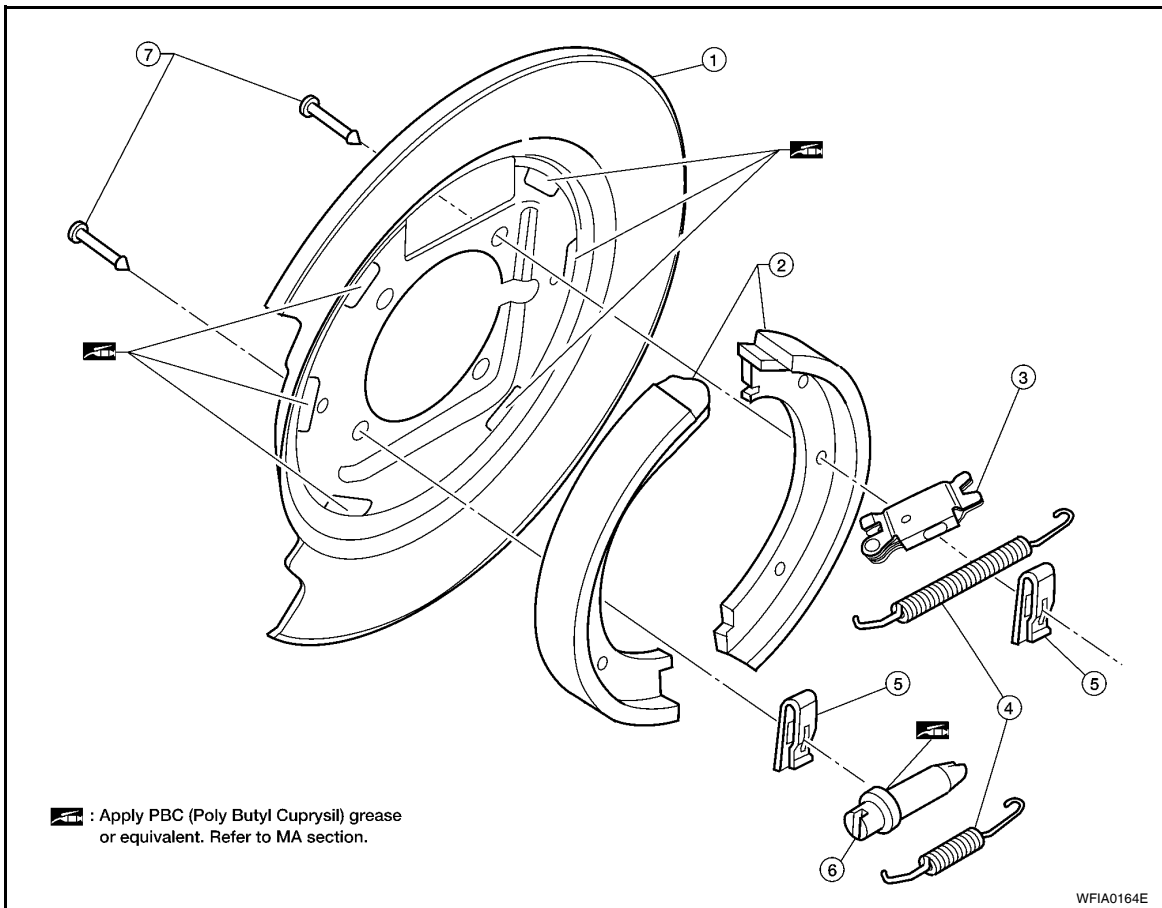

- | | | |
|---------------------|--------------|-----------------|
| 1. Back plate | 2. Shoes | 3. Toggle lever |
| 4. Return springs | 5. Retainers | 6. Adjuster |
| 7. Anti-rattle pins | | |

REMOVAL

WARNING:

Clean the brakes with a vacuum dust collector to minimize the hazard of airborne particles or other materials.

NOTE:

Remove the disc rotor only with the parking brake pedal completely disengaged.

1. Remove wheel hub and bearing assembly. Refer to [FAX-5. "Removal and Installation"](#).
 - Disconnect the wheel sensor at the harness connector. It is not necessary to remove the wheel sensor from the wheel hub and bearing assembly.
2. Remove the return springs.
3. Remove the adjuster.
4. Remove the retainers, anti-rattle pins and shoes.
5. Disconnect the rear cable from the toggle lever.
6. Remove the back plate.

INSPECTION AFTER REMOVAL


Lining Thickness Inspection

PARKING BRAKE SHOE

< SERVICE INFORMATION >

- Check thickness of lining.


Standard thickness "A" : 5.15 ± 0.25 mm
(0.203 ± 0.010 in)
Wear limit thickness "A" : 0.5 mm (0.020 in)

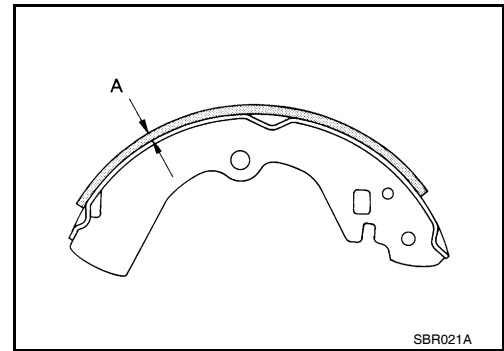

Drum Inner Diameter Inspection

- Check drum inner diameter.

Standard inner diameter : 205 ± 0.13 mm
(8.07 ± 0.01 in)
Wear limit of inner diameter : 205.7 mm (8.10 in)

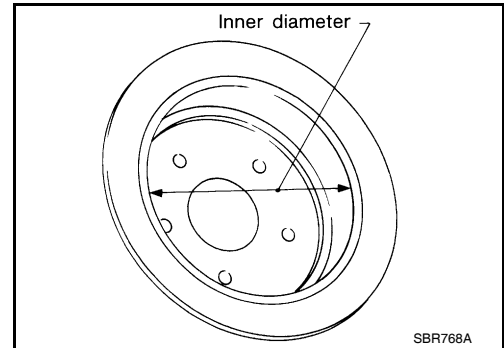

Other Inspections

- Check shoe sliding surface for excessive wear and damage.
- Check anti-rattle pins for excessive wear and corrosion.
- Check return springs for sagging.
- Check adjuster for rough operation.
- When disassembling adjuster, apply PBC (Poly Butyl Cuprysil) grease or equivalent to the adjuster threads. Refer to [MA-10](#).
- Check either visually or with a vernier caliper to see if there is any excessive wear, cracks, or damage inside drum.

INSTALLATION


Installation is in the reverse order of removal.

- Apply brake grease to the specified points during assembly. Refer to [PB-4. "Component"](#).
- Install adjuster so that threaded part expands when rotating it in the direction shown by the arrow.
- Shorten adjuster by rotating it in the opposite direction as shown by the arrow.

NOTE:

After replacing brake shoes or disc rotors, or if parking brake does not function well, perform break-in operation as follows.

1. Adjust parking brake pedal stroke. Refer to [PB-3. "On-Vehicle Service"](#).

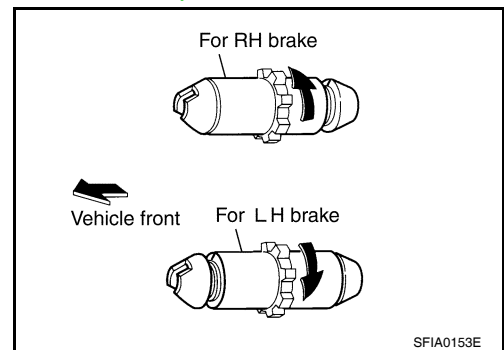

2. Perform parking brake burnishing operation by driving the vehicle forward under the following conditions:

- **Vehicle speed 40 km/h (25 mph) set (forward)**
- **Parking brake operating force 196 N (20.0 kg-f, 44.1 lb-f) set**
- **Apply time 30 sec.**

CAUTION:

- **To prevent lining from getting too hot, allow a cool off period of approximately 5 minutes after every break-in operation.**

PARKING BRAKE SHOE

< SERVICE INFORMATION >

- Do not perform excessive break-in operations, because it may cause uneven or early wear of lining.
3. After burnishing operation, check parking brake pedal stroke. Readjust if it is now longer than the specified stroke. Refer to [PB-3, "On-Vehicle Service"](#) .

SERVICE DATA AND SPECIFICATIONS (SDS)

< SERVICE INFORMATION >

SERVICE DATA AND SPECIFICATIONS (SDS)

Parking Drum Brake

INFOID:000000003532759

Unit: mm (in)

Type		Drum
Brake lining	Standard thickness (new)	5.15 ± 0.25 (0.203 ± 0.010)
	Wear limit thickness	0.5 (0.020)
Drum inner diameter (disc)	Standard inner diameter (new)	205 ± 0.13 (8.07 ± 0.01)
	Wear limit of inner diameter	205.7 (8.10)

Parking Brake Control

INFOID:000000003532760

Control type	Foot pedal
Number of notches [under force of 196 N (20.0 kg-f, 44.1 lb-f)]	3 – 4 notches
Number of notches when parking brake warning lamp switch comes on	1 notch

A
B
C
D
E
PB
G
H
I
J
K
L
M
N
O
P